

## Product Change Notice (PCN)

**Date:** 04/18/2024

**PCN Number:** PCN-0456197R-01

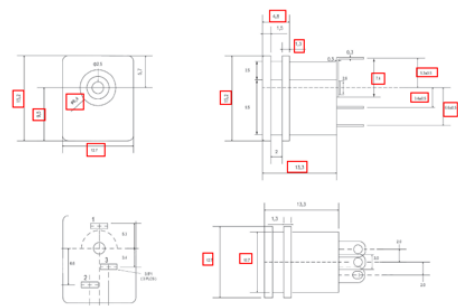
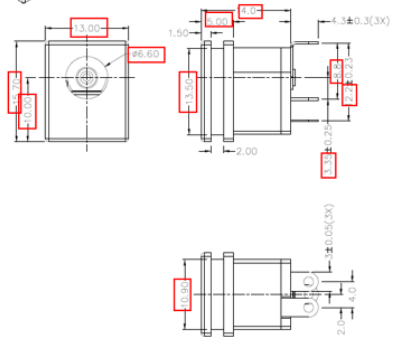
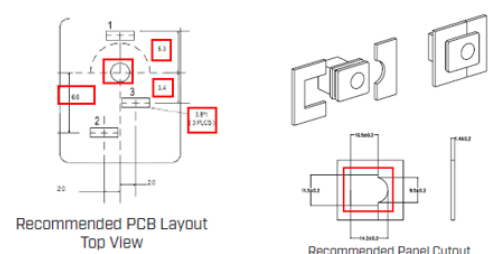
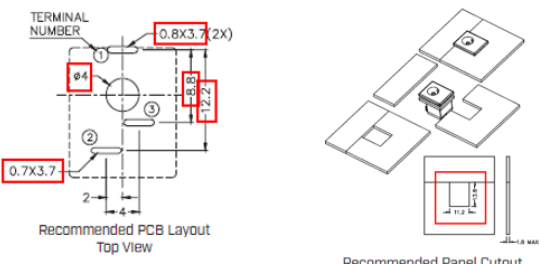
To Our Customers:



We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: *PJ-009B*

Reason(s) for Change: *Manufacturing Improvement processes*

Description of Change: *Product re-engineered for improved manufacturability and production yield. See image below for product changes and refer to the updated drawing online. Cosmetic differences may be visible and not affect the form fit and function of the product.*

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE
	
 <p>Recommended PCB Layout Top View</p> <p>Recommended Panel Cutout</p>	 <p>TERMINAL NUMBER</p> <p>Recommended PCB Layout Top View</p> <p>Recommended Panel Cutout</p>

PREVIOUS CUI DEVICES DETAIL / IMAGE					NEW CUI DEVICES DETAIL / IMAGE																																																																																																																																																				
<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>center pin</td> <td>brass</td> <td>nickel</td> <td colspan="2"></td> </tr> <tr> <td>terminal 1</td> <td>brass</td> <td>tin</td> <td colspan="2"></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>tin</td> <td colspan="2"></td> </tr> <tr> <td>terminal 3</td> <td>brass</td> <td>tin</td> <td colspan="2"></td> </tr> <tr> <td>housing</td> <td>PBT (UL94V-0)</td> <td>black</td> <td colspan="2"></td> </tr> </tbody> </table>					DESCRIPTION	MATERIAL	PLATING/COLOR			center pin	brass	nickel			terminal 1	brass	tin			terminal 2	copper alloy	tin			terminal 3	brass	tin			housing	PBT (UL94V-0)	black			<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>center pin</td> <td>brass</td> <td>nickel</td> <td colspan="2"></td> </tr> <tr> <td>terminal 1</td> <td>brass</td> <td>tin over nickel</td> <td colspan="2"></td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>tin over nickel</td> <td colspan="2"></td> </tr> <tr> <td>terminal 3</td> <td>brass</td> <td>tin over nickel</td> <td colspan="2"></td> </tr> <tr> <td>housing</td> <td>PBT (UL94V-0)</td> <td>black</td> <td colspan="2"></td> </tr> </tbody> </table>					DESCRIPTION	MATERIAL	PLATING/COLOR			center pin	brass	nickel			terminal 1	brass	tin over nickel			terminal 2	copper alloy	tin over nickel			terminal 3	brass	tin over nickel			housing	PBT (UL94V-0)	black																																																																																						
DESCRIPTION	MATERIAL	PLATING/COLOR																																																																																																																																																							
center pin	brass	nickel																																																																																																																																																							
terminal 1	brass	tin																																																																																																																																																							
terminal 2	copper alloy	tin																																																																																																																																																							
terminal 3	brass	tin																																																																																																																																																							
housing	PBT (UL94V-0)	black																																																																																																																																																							
DESCRIPTION	MATERIAL	PLATING/COLOR																																																																																																																																																							
center pin	brass	nickel																																																																																																																																																							
terminal 1	brass	tin over nickel																																																																																																																																																							
terminal 2	copper alloy	tin over nickel																																																																																																																																																							
terminal 3	brass	tin over nickel																																																																																																																																																							
housing	PBT (UL94V-0)	black																																																																																																																																																							
 <p>MATING PLUG Jack Insertion Depth: 9.5 mm</p>					 <p>MATING PLUG Jack Insertion Depth: 9.6 mm</p>																																																																																																																																																				
<p><b>SPECIFICATIONS</b></p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>rated input voltage</td> <td></td> <td></td> <td>24</td> <td></td> <td>Vdc</td> </tr> <tr> <td>rated input current</td> <td></td> <td></td> <td>2.5</td> <td></td> <td>A</td> </tr> <tr> <td>contact resistance</td> <td>between terminal and mating plug</td> <td></td> <td>50</td> <td></td> <td>mΩ</td> </tr> <tr> <td></td> <td>between terminal in a closed circuit</td> <td></td> <td>30</td> <td></td> <td>mΩ</td> </tr> <tr> <td>insulation resistance</td> <td>at 500 Vdc</td> <td>100</td> <td></td> <td></td> <td>MΩ</td> </tr> <tr> <td>voltage withstand</td> <td>for 1 minute</td> <td></td> <td></td> <td>500</td> <td>Vac</td> </tr> <tr> <td>insertion/withdrawal force</td> <td></td> <td>0.5</td> <td>2</td> <td></td> <td>kg</td> </tr> <tr> <td>operating temperature</td> <td></td> <td>-25</td> <td></td> <td>85</td> <td>°C</td> </tr> <tr> <td>life</td> <td></td> <td></td> <td>5,000</td> <td></td> <td>cycles</td> </tr> <tr> <td>flammability rating</td> <td>UL94V-0</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RoHS</td> <td>yes</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>					parameter	conditions/description	min	typ	max	units	rated input voltage			24		Vdc	rated input current			2.5		A	contact resistance	between terminal and mating plug		50		mΩ		between terminal in a closed circuit		30		mΩ	insulation resistance	at 500 Vdc	100			MΩ	voltage withstand	for 1 minute			500	Vac	insertion/withdrawal force		0.5	2		kg	operating temperature		-25		85	°C	life			5,000		cycles	flammability rating	UL94V-0					RoHS	yes					<p><b>SPECIFICATIONS</b></p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>rated input voltage</td> <td></td> <td></td> <td>24</td> <td></td> <td>Vdc</td> </tr> <tr> <td>rated input current</td> <td></td> <td></td> <td>2.5</td> <td></td> <td>A</td> </tr> <tr> <td>contact resistance</td> <td>between terminal and mating plug</td> <td></td> <td>50</td> <td></td> <td>mΩ</td> </tr> <tr> <td></td> <td>between terminal in a closed circuit</td> <td></td> <td>30</td> <td></td> <td>mΩ</td> </tr> <tr> <td>insulation resistance</td> <td>at 500 Vdc</td> <td>100</td> <td></td> <td></td> <td>MΩ</td> </tr> <tr> <td>voltage withstand</td> <td>for 1 minute</td> <td></td> <td></td> <td>500</td> <td>Vac</td> </tr> <tr> <td>insertion/withdrawal force</td> <td></td> <td>0.3</td> <td>3</td> <td></td> <td>kg</td> </tr> <tr> <td>operating temperature</td> <td></td> <td>-25</td> <td></td> <td>85</td> <td>°C</td> </tr> <tr> <td>life</td> <td></td> <td></td> <td>5,000</td> <td></td> <td>cycles</td> </tr> <tr> <td>flammability rating</td> <td>UL94V-0</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RoHS</td> <td>yes</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>					parameter	conditions/description	min	typ	max	units	rated input voltage			24		Vdc	rated input current			2.5		A	contact resistance	between terminal and mating plug		50		mΩ		between terminal in a closed circuit		30		mΩ	insulation resistance	at 500 Vdc	100			MΩ	voltage withstand	for 1 minute			500	Vac	insertion/withdrawal force		0.3	3		kg	operating temperature		-25		85	°C	life			5,000		cycles	flammability rating	UL94V-0					RoHS	yes				
parameter	conditions/description	min	typ	max	units																																																																																																																																																				
rated input voltage			24		Vdc																																																																																																																																																				
rated input current			2.5		A																																																																																																																																																				
contact resistance	between terminal and mating plug		50		mΩ																																																																																																																																																				
	between terminal in a closed circuit		30		mΩ																																																																																																																																																				
insulation resistance	at 500 Vdc	100			MΩ																																																																																																																																																				
voltage withstand	for 1 minute			500	Vac																																																																																																																																																				
insertion/withdrawal force		0.5	2		kg																																																																																																																																																				
operating temperature		-25		85	°C																																																																																																																																																				
life			5,000		cycles																																																																																																																																																				
flammability rating	UL94V-0																																																																																																																																																								
RoHS	yes																																																																																																																																																								
parameter	conditions/description	min	typ	max	units																																																																																																																																																				
rated input voltage			24		Vdc																																																																																																																																																				
rated input current			2.5		A																																																																																																																																																				
contact resistance	between terminal and mating plug		50		mΩ																																																																																																																																																				
	between terminal in a closed circuit		30		mΩ																																																																																																																																																				
insulation resistance	at 500 Vdc	100			MΩ																																																																																																																																																				
voltage withstand	for 1 minute			500	Vac																																																																																																																																																				
insertion/withdrawal force		0.3	3		kg																																																																																																																																																				
operating temperature		-25		85	°C																																																																																																																																																				
life			5,000		cycles																																																																																																																																																				
flammability rating	UL94V-0																																																																																																																																																								
RoHS	yes																																																																																																																																																								

Affected Date Code: All orders placed after **04/10/2024**

Product Availability: *Pertaining to market availability*

PCN Approval:

Operations/Quality



Product Management



F-723-001

Revision: A