

## MODEL: CPG-06-TH-TR | DESCRIPTION: POGO PIN

#### FEATURES

- pogo pin
- through hole
- gold plated
- 3 mm recommended working height



.....

# ROHS


## **SPECIFICATIONS**

.....

parameter	conditions/description	min	typ	max	units
rated voltage				12	Vdc
rated current				1	А
contact resistance	at working height			50	mΩ
force at mid stroke	at working height	30	40	50	gf
initial force			30		gf
mid stroke			0.5		mm
full stroke			0.8		mm
working height			З		mm
life		10,000			cycles
operating temperature		-20		85	°C
RoHS	yes				

#### **MECHANICAL DRAWING**

.....

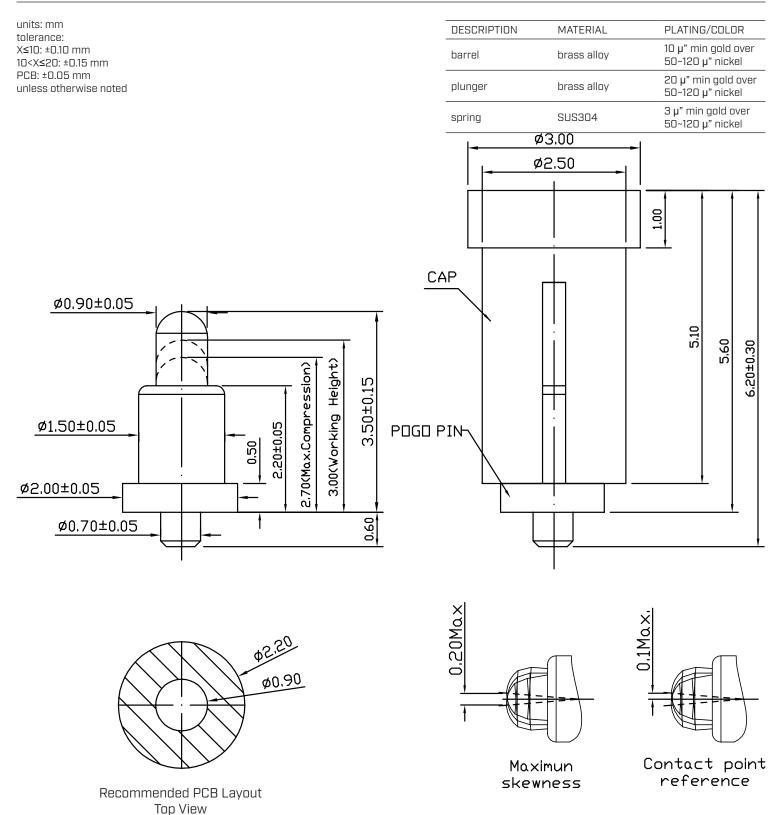

.....

cuidevices.com


2.70 ::않중


### PACKAGING

#### units: mm

Reel Size: Ø330 mm Reel QTY: 1,200 pcs per reel

.....

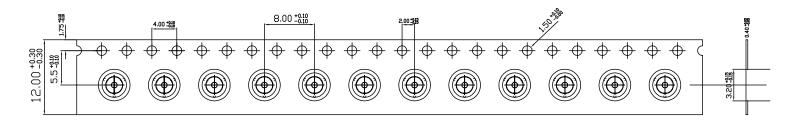

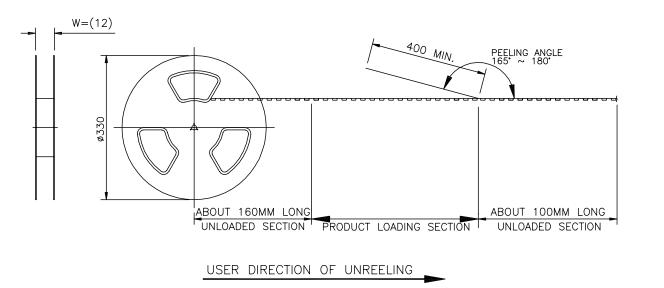

#### **REVISION HISTORY**

rev.	description	date	
1.0	initial release	01/18/2024	

The revision history provided is for informational purposes only and is believed to be accurate.

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.



CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.