

MODEL: SJ1-42516-SMT-TR | **DESCRIPTION:** AUDIO JACK**FEATURES**

- right angle
- plastic bushing
- gold flash


**SPECIFICATIONS**

| parameter | conditions/description | min | typ | max | units |
|----------------------------|--|-----|-------|-----------|----------|
| rated input voltage | | | 12 | | Vdc |
| rated input current | | | | 1 | A |
| contact resistance | between terminal and mating plug between terminal in a closed circuit | | | 100 30 | mΩ mΩ |
| insulation resistance | at 500 Vdc | 100 | | | MΩ |
| voltage withstand | for 1 minute | | | 500 | Vac |
| insertion/withdrawal force | | 0.3 | | 3 | kg |
| operating temperature | | -25 | | 85 | °C |
| life | | | 5,000 | | cycles |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |

SOLDERABILITY


| parameter | conditions/description | min | typ | max | units |
|------------------|-------------------------|-----|-----|-----|-------|
| reel storage | 5~25°C, 20~75% humidity | | | | |
| reflow soldering | see reflow profile | 255 | 260 | | °C |

Note: 1. CUI Devices recommends usage of the product within 24 hours after T&R is opened. After 24 hours, CUI Devices recommends drying the parts prior to use.


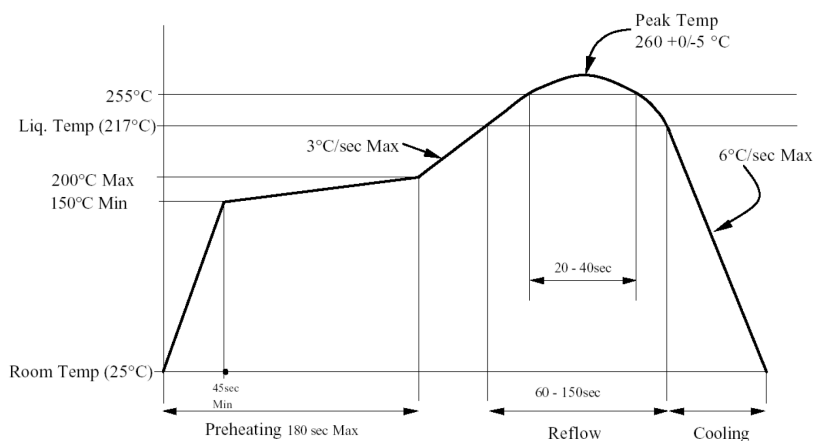


MECHANICAL DRAWING




units: mm
 tolerance:
 X.X ±0.30 mm
 X.XX ±0.25 mm
 X.XXX ±0.20 mm
 PCB: ±0.05 mm
 unless otherwise specified



| DESCRIPTION | MATERIAL | PLATING/COLOR |
|-------------|----------------|---------------|
| terminal 1 | C5191 t=0.25 | gold flash |
| terminal 2 | C5191 t=0.20 | gold flash |
| terminal 3 | C5191 t=0.20 | gold flash |
| terminal 4 | C5191 t=0.30 | gold flash |
| terminal 5 | C2680 t=0.30 | gold flash |
| terminal 6 | C2680 t=0.30 | gold flash |
| housing | PA9T [UL94V-0] | black |

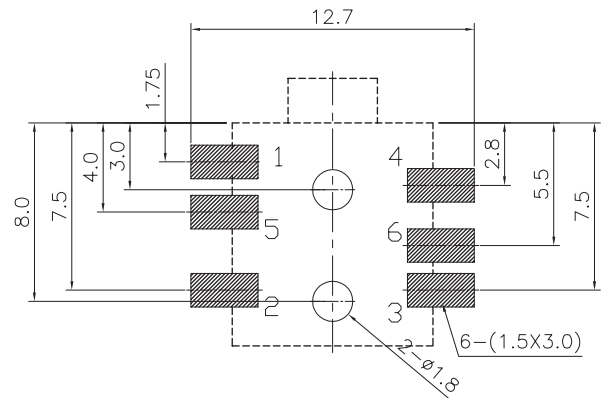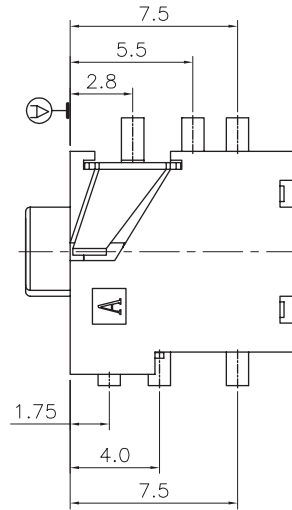

Recommended PCB Layout
Top View

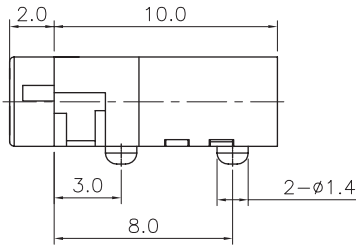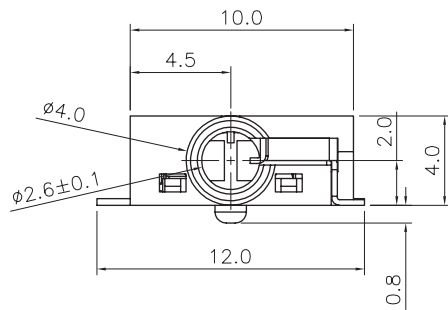


| Model No. | SJ1-42516-SMT |
|-----------|---------------|
| Schematic | |
| PIN | |
| 1 | sleeve |
| 2 | tip |
| 3 | ring 1 |
| 4 | ring 2 |
| 5 | tip switch |
| 6 | ring switch |

PACKAGING

units: mm

Reel Size: $\varnothing 330$ mm

Reel QTY: 650 pcs per reel

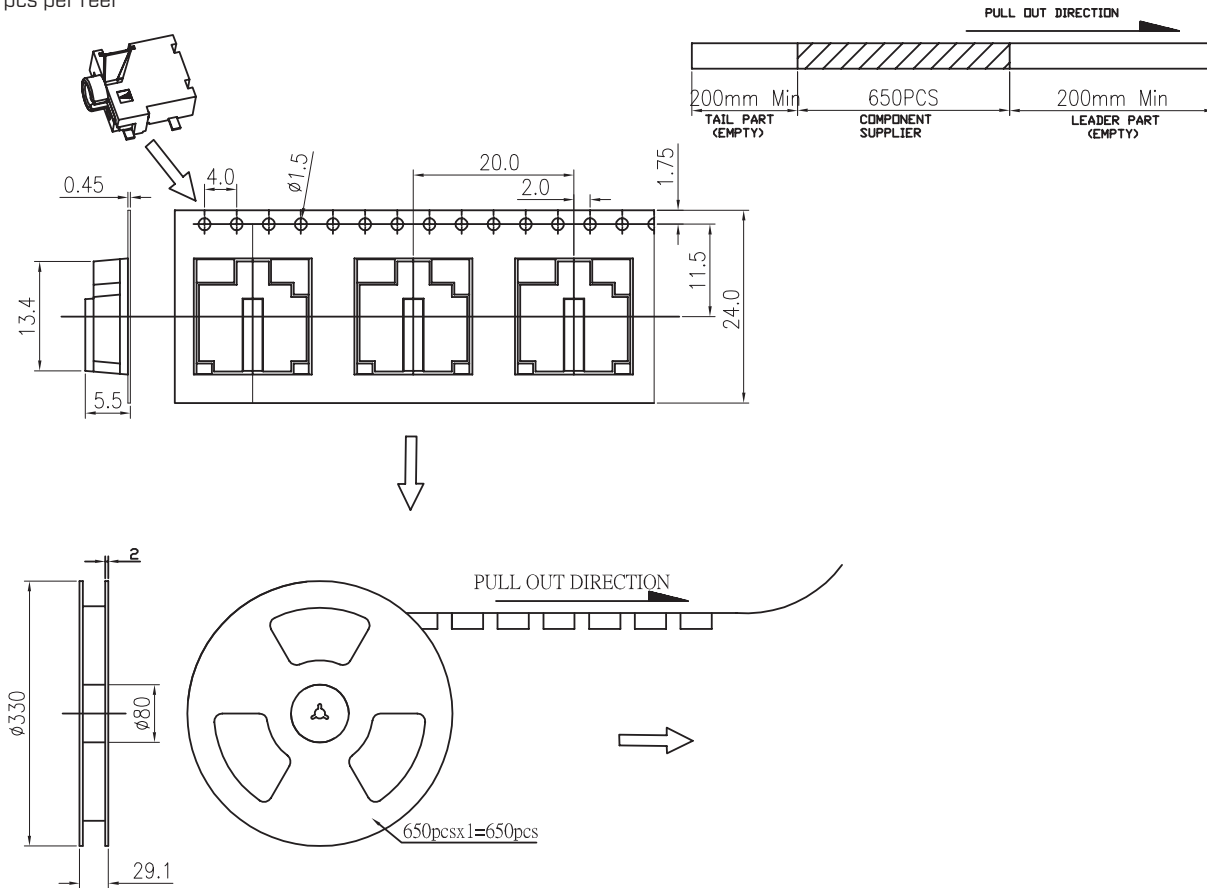

REVISION HISTORY

| rev. | description | date |
|------|--|------------|
| 1.0 | initial release | 10/27/2005 |
| 1.01 | new template applied | 02/17/2012 |
| 1.02 | added TR package option | 11/01/2012 |
| 1.03 | added storage and drying conditions, and tape and reel packaging details | 01/03/2018 |
| 1.04 | brand update | 10/04/2019 |
| 1.05 | discontinued models SJ1-42515TS-SMT-TR, SJ1-42515RS-SMT-TR & SJ1-42514-SMT-TR ; logo, datasheet style update | 08/18/2022 |
| 1.06 | product reengineered for improved manufacturability and production yield, see PCN for details | 09/14/2023 |

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

cuidevices.com